TYPICAL SECTION

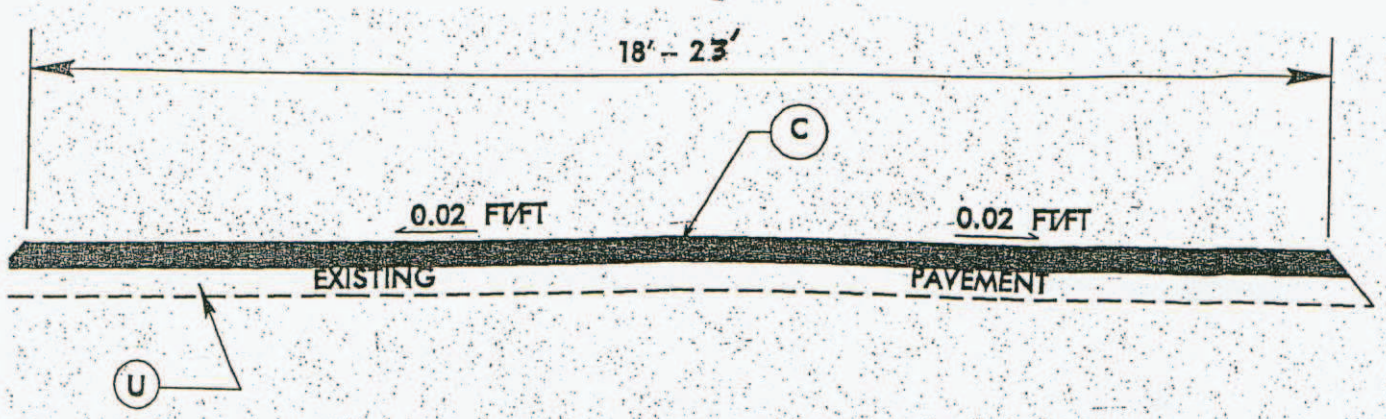

TYPICAL SECTION NO. 1

PAVEMENT SCHEDULE	
C	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
CI	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
D	PROP. APPROX. 2½" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C. AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
E	PROP. APPROX. 5 " ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD.
EI	PROP. APPROX. 5½" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD.
F	MAT COAT NO. 6 STONE
V	MILLING ASPHALT PAVEMENT, 1½" DEPTH.
T	EARTH MATERIAL
U	EXISTING PAVEMENT.